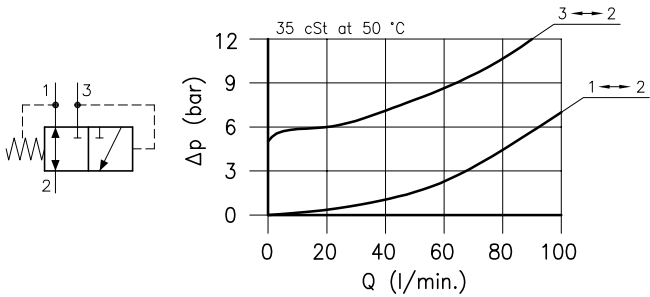
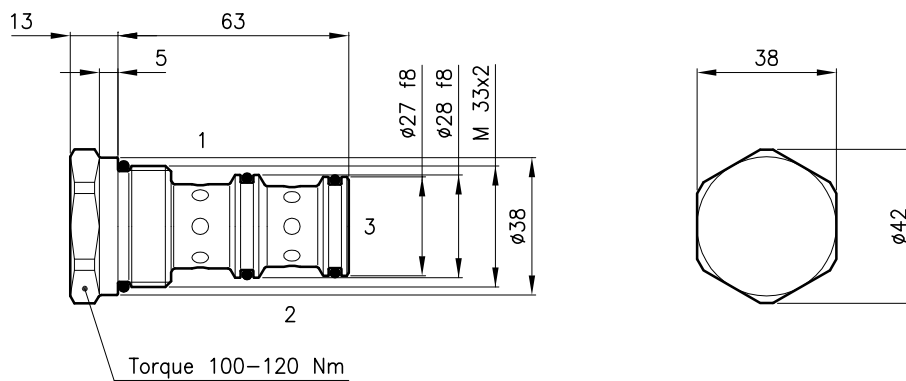



Technical features



Cavity	(For dimensions see catalogue 17.000)	S 50/3
Nominal flow	(l/min.)	80
Max. pressure	(bar)	350
Activation spool pressure	(bar)	6
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.250
Hydraulic fluid; mineral oil HM and HV	ISO 6074	
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

Ordering informations
VDT 50/3203

VDT 50 = Valve type



Circuit

3203 =


Codes:

VDT 50/3203 52 011 102

External seals kit 90 620 107

VDT 50 valves can be assembled on standard bodies 50-C3 series; for dimensions see catalogue 16.010