MOTION CONTROL

CROSS–LINE BODY

CMQ 30/..–PP

Technical features

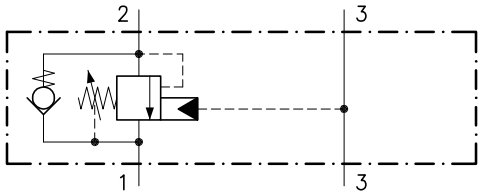

Valve (For features see catalogue 07.060)		CMQ 30
Max. flow	(l/min.)	50
Max. system pressure	(bar)	315
Max. setting pressure	(bar)	420
Pilot ratio		8:1
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.790

Dimensions

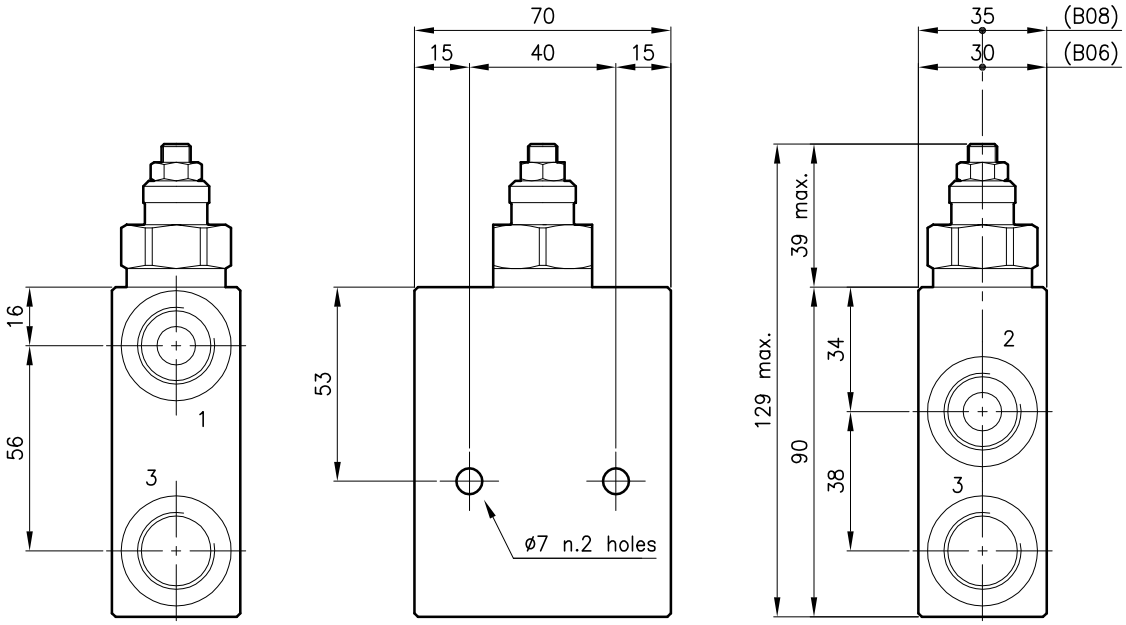

Ordering informations

CMQ 30/T–L–PP–B08

CMQ 30 = Valve type

Standard springs

Type		Setting range	Factory set
D	=	25 – 125 bar	105 bar
T	=	105 – 420 bar	280 bar

Adjustment type

L = Adjustment with overset protection

Version

Standard ports

B06 = G 3/8 ISO 228

B08 = G 1/2 ISO 228

Codes:

CMQ 30/D–L–PP–B06	34 011 155
CMQ 30/T–L–PP–B06	34 011 156
CMQ 30/D–L–PP–B08	34 011 157
CMQ 30/T–L–PP–B08	34 011 158

Only bodies code:

Body type 30–PP–B06	38 144 120
Body type 30–PP–B08	38 144 236