



**Features**

- Radial leaded devices
- Smaller size for similar I hold rating
- Faster tripping
- RoHS compliant\* and halogen free\*\*

**Applications**

- Automotive applications
- Anywhere space is limited and fast tripping is required

**PRCP-RG Series - Polymer Resettable Circuit Protectors**

**Electrical Characteristics**

| Model      | V max. Volts | I max. Amps | I <sub>hold</sub> | I <sub>trip</sub> | Initial Resistance |       | 1Hour(R <sub>1</sub> ) Post-Trip Resistance | Max. Time To Trip |                  | Tripped Power Dissipation |
|------------|--------------|-------------|-------------------|-------------------|--------------------|-------|---|-------------------|------------------|---------------------------|
|            |              |             | Amperes at 23 °C  |                   | Ohms at 23 °C      |       | Ohms at 23 °C                               | Amperes at 23 °C  | Seconds at 23 °C | Watts at 23 °C            |
|            |              |             | Hold              | Trip              | Min.               | Max.  | Max.  |                   |                  | Typ.                      |
| PRCP-RG300 | 16           | 100         | 3.00              | 5.10              | 0.038              | 0.065 | 0.0975                                      | 15                | 1.0              | 2.30                      |
| PRCP-RG500 | 16           | 100         | 5.00              | 8.50              | 0.015              | 0.023 | 0.0340                                      | 25                | 2.0              | 2.60                      |

**Environmental Characteristics**

|  |  |
|--|--|
| Operating/Storage Temperature.....                       | -40 °C to 85 °C  |
| Maximum Device Surface Temperature in Tripped State..... | 125 °C   |
| Passive Aging.....                                       | +85 °C, 1000 hours..... ±5 % typical resistance change           |
| Humidity Aging.....                                      | +85 °C, 85 % R.H. 1000 hours..... ±5 % typical resistance change |
| Thermal Shock.....                                       | +85 °C to -40 °C, 20 times..... ±10 % typical resistance change  |
| Solvent Resistance.....                                  | MIL-STD-202, Method 215..... No change                           |
| Vibration.....   | MIL-STD-883C, Method 2007.1, Condition A..... No change          |

**Test Procedures And Requirements For Model PRCP-RG Series**

| Test                 | Test Conditions                                       | Accept/Reject Criteria                   |
|----------------------|---|--|
| Visual/Mech.....     | Verify dimensions and materials.....                  | Per P.R.C.P. physical description        |
| Resistance.....      | In still air @ 23 °C.....                             | R <sub>min</sub> ≤ R ≤ R <sub>1max</sub> |
| Time to Trip.....    | At specified current, V <sub>max</sub> , 23 °C.....   | T ≤ max.time to trip (seconds)           |
| Hold Current.....    | 30 min at I <sub>hold</sub> .....                     | No trip                                  |
| Trip Cycle Life..... | V <sub>max</sub> , I <sub>max</sub> , 100 cycles..... | No arcing or burning                     |
| Trip Endurance.....  | V <sub>max</sub> , 48 hours.....                      | No arcing or burning                     |

**Thermal Derating Chart - I<sub>hold</sub> (Amps)**

| Model      | Ambient Operating Temperature |        |      |       |       |       |       |       |       |
|------------|-------------------------------|--------|------|-------|-------|-------|-------|-------|-------|
|            | -40 °C                        | -20 °C | 0 °C | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C |
| PRCP-RG300 | 4.4                           | 4.0    | 3.6  | 3.0   | 2.6   | 2.4   | 2.1   | 1.9   | 1.4   |
| PRCP-RG500 | 7.3                           | 6.6    | 6.0  | 5.0   | 4.4   | 4.0   | 3.6   | 3.1   | 2.4   |

\*I<sub>trip</sub> is approximately two times I<sub>hold</sub>.

\*RoHS Directive 2015/863 Mar. 31 2015 and Annex.

\*\*COPAL follows the prevailing definition of "halogen free" in the industry. COPAL considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Customers should verify actual device performance in their specific applications.


# PRCP-RG Series - Polymer Resettable Circuit Protectors

## Product Dimensions

| Model      | A<br>Max.       | B<br>Max.       | C              |                | D<br>Min.      | E<br>Max.      | F<br>Nom.       | Physical Characteristics |                 |          |
|------------|-----------------|-----------------|----------------|----------------|----------------|----------------|-----------------|--------------------------|-----------------|----------|
|            |                 |                 | Nom.           | Tol. ±         |                |                |                 | Style                    | Lead Dia.       | Material |
| PRCP-RG300 | 7.1<br>(0.280)  | 11.0<br>(0.433) | 5.1<br>(0.201) | 0.7<br>(0.028) | 7.6<br>(0.299) | 3.0<br>(0.118) | 0.81<br>(0.032) | 1                        | 0.81<br>(0.032) | Sn/Cu    |
| PRCP-RG500 | 10.4<br>(0.409) | 14.3<br>(0.563) | 5.1<br>(0.201) | 0.7<br>(0.028) | 7.6<br>(0.299) | 3.0<br>(0.118) | 0.81<br>(0.032) | 1                        | 0.81<br>(0.032) | Sn/Cu    |

Packaging options:  
 BULK: 500 pcs. per bag. TAPE & REEL: 3000 pcs. per reel.


0.81 (20AWG)      DIMENSIONS =  $\frac{\text{MM}}{\text{(INCHES)}}$

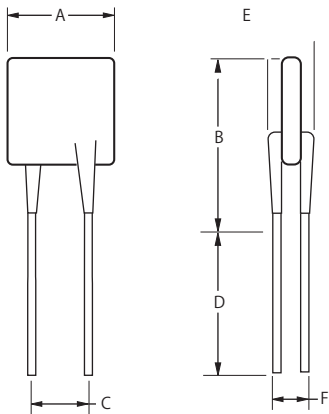

NOTE: Kinked leads are available for board standoff options. Contact factory for details.

### Typical Part Marking

Represents total content. Layout may vary.

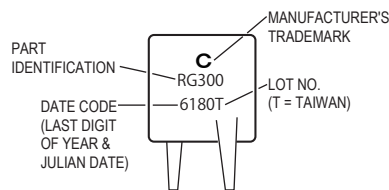


### How to Order

**PRCP - RG 300 - 0**

Product Designator \_\_\_\_\_  
 Style \_\_\_\_\_  
 RG = Smaller Radial Leaded Component  
 Component \_\_\_\_\_  
 Hold Current,  $I_{hold}$  \_\_\_\_\_  
 300-500 (3.0 Amps - 5.0 Amps)  
 Packaging Options \_\_\_\_\_  
 - 0 = Bulk Packaging  
 - 2 = Tape and Reel

## Typical Time to Trip at 23 °C

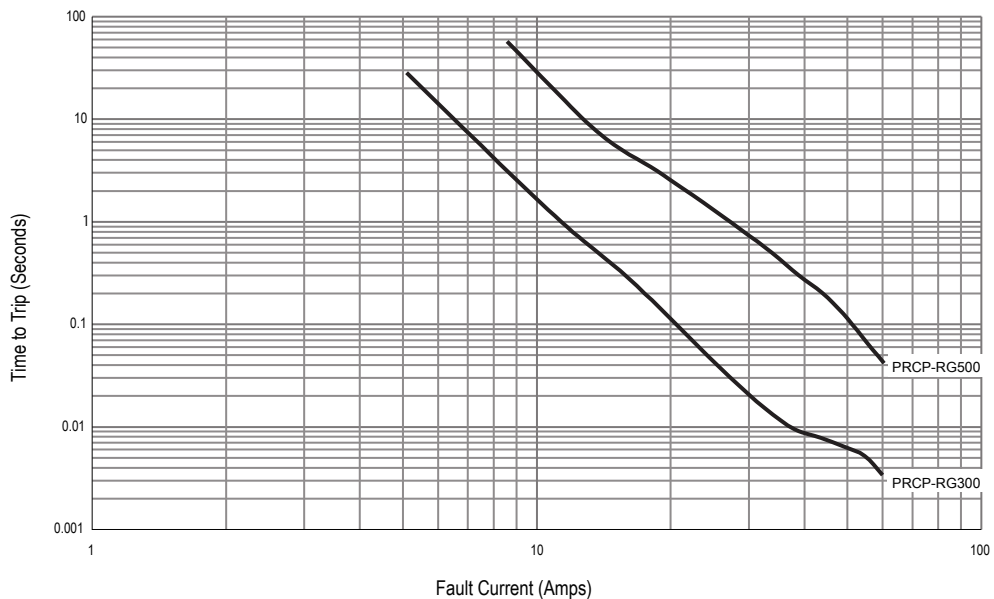

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Customers should verify actual device performance in their specific applications.

## PRCP-RG Series Tape and Reel Specifications

Devices taped using EIA468-B/IEC60286-2 standards. See table below and Figures 1 and 2 for details.

| Dimension Description                             | IEC Mark        | EIA Mark       | Dimensions              |                                    |
|---|-----------------|----------------|-------------------------|------------------------------------|
|   |                 |                | Dimension               | Tolerance                          |
| Carrier tape width                                | W               | W              | $\frac{18}{(0.709)}$    | $\frac{-0.5/+1.0}{(-0.02/+0.039)}$ |
| Hold down tape width                              |                 | W4             | $\frac{11}{(0.433)}$    | min.                               |
| Hold down tape                                    | W <sub>0</sub>  |                | No protrusion           |                                    |
| Top distance between tape edges                   | W <sub>2</sub>  | W <sub>6</sub> | $\frac{3}{(0.118)}$     | max.                               |
| Sprocket hole position                            | W <sub>1</sub>  | W <sub>5</sub> | $\frac{9}{(0.354)}$     | $\frac{-0.5/+0.75}{(-0.02/+0.03)}$ |
| Sprocket hole diameter                            | D <sub>0</sub>  | D <sub>0</sub> | $\frac{4}{(0.157)}$     | $\frac{\pm 0.2}{(\pm 0.0078)}$     |
| Abscissa to plane (straight lead)                 | H               | H              | $\frac{18.5}{(0.728)}$  | $\frac{\pm 3.0}{(\pm 0.118)}$      |
| Abscissa to plane (kinked lead)                   | H <sub>0</sub>  | H <sub>0</sub> | $\frac{16}{(0.63)}$     | $\frac{\pm 0.5}{(\pm 0.02)}$       |
| Abscissa to top (straight lead)                   | H <sub>1</sub>  | H <sub>1</sub> | $\frac{38.0}{(1.496)}$  | max.                               |
| Abscissa to top (kinked lead)                     | H <sub>1</sub>  | H <sub>1</sub> | $\frac{32.2}{(1.268)}$  | max.                               |
| Overall width w/lead protrusion (straight lead)   |                 | C <sub>1</sub> | $\frac{55.0}{(2.165)}$  | max.                               |
| Overall width w/lead protrusion (kinked lead)     |                 | C <sub>1</sub> | $\frac{43.2}{(1.7)}$    | max.                               |
| Overall width w/o lead protrusion (straight lead) |                 | C <sub>2</sub> | $\frac{54.0}{(2.126)}$  | max.                               |
| Overall width w/o lead protrusion (kinked lead)   |                 | C <sub>2</sub> | $\frac{42.5}{(1.673)}$  | max.                               |
| Lead protrusion                                   | l <sub>1</sub>  | l <sub>1</sub> | $\frac{1.0}{(0.039)}$   | max.                               |
| Protrusion of cutout                              | L               | L              | $\frac{11}{(0.433)}$    | max.                               |
| Protrusion beyond hold-down tape                  | l <sub>2</sub>  | l <sub>2</sub> | Not specified           |                                    |
| Sprocket hole pitch                               | P <sub>0</sub>  | P <sub>0</sub> | $\frac{12.7}{(0.5)}$    | $\frac{\pm 0.3}{(\pm 0.012)}$      |
| Pitch tolerance                                   |                 |                | 20 consecutive          | $\frac{\pm 1}{(\pm 0.039)}$        |
| Device pitch                                      |                 |                | $\frac{12.7}{(0.5)}$    |                                    |
| Tape thickness                                    | t               | t              | $\frac{0.9}{(0.035)}$   | max.                               |
| Tape thickness with splice                        |                 | t <sub>1</sub> | $\frac{2.0}{(0.079)}$   | max.                               |
| Splice sprocket hole alignment                    |                 |                | $\frac{4.0}{(0.157)}$   | $\frac{\pm 0.2}{(\pm 0.008)}$      |
| Body lateral deviation                            | Δ <sub>h</sub>  | Δ <sub>h</sub> | 0                       | $\frac{\pm 1}{(\pm 0.039)}$        |
| Body tape plane deviation                         | Δ <sub>p</sub>  | Δ <sub>p</sub> | 0                       | $\frac{\pm 1.3}{(\pm 0.051)}$      |
| Lead seating plane deviation                      | ΔP <sub>1</sub> | P <sub>1</sub> | $\frac{3.81}{(0.015)}$  | $\frac{\pm 0.7}{(\pm 0.028)}$      |
| Lead spacing                                      | F               | F              | $\frac{8.0}{(0.315)}$   |                                    |
| Reel width  | w               | w              | $\frac{56.0}{(2.20)}$   | max.                               |
| Reel diameter                                     | d               | a              | $\frac{370.0}{(14.57)}$ | max.                               |
| Space between flanges less device                 |                 |                | $\frac{4.75}{(0.187)}$  | $\frac{\pm 3.25}{(\pm 0.128)}$     |

DIMENSIONS =  $\frac{\text{MM}}{\text{(INCHES)}}$


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Customers should verify actual device performance in their specific applications.


# PRCP-RG Series Tape and Reel Specifications

| Dimension Description      | IEC Mark | EIA Mark | Dimensions  |                                |
|----------------------------|----------|----------|---|--------------------------------|
|                            |          |          | Dimension   | Tolerance                      |
| Arbor hole diameter        | f        | c        | $\frac{26.0}{(1.02)}$   | $\frac{\pm 12.0}{(\pm 0.472)}$ |
| Core diameter              | h        | n        | $\frac{80.0}{(3.15)}$   | max.                           |
| Box                        |          |          | $\frac{62}{(2.44)}$ $\frac{355}{(14.0)}$ $\frac{345}{(13.6)}$ | max.                           |
| Consecutive missing places |          |          | 3   | max.                           |
| Empty places per reel      |          |          | Not specified   |                                |

Taped Component Dimensions - Figure 1

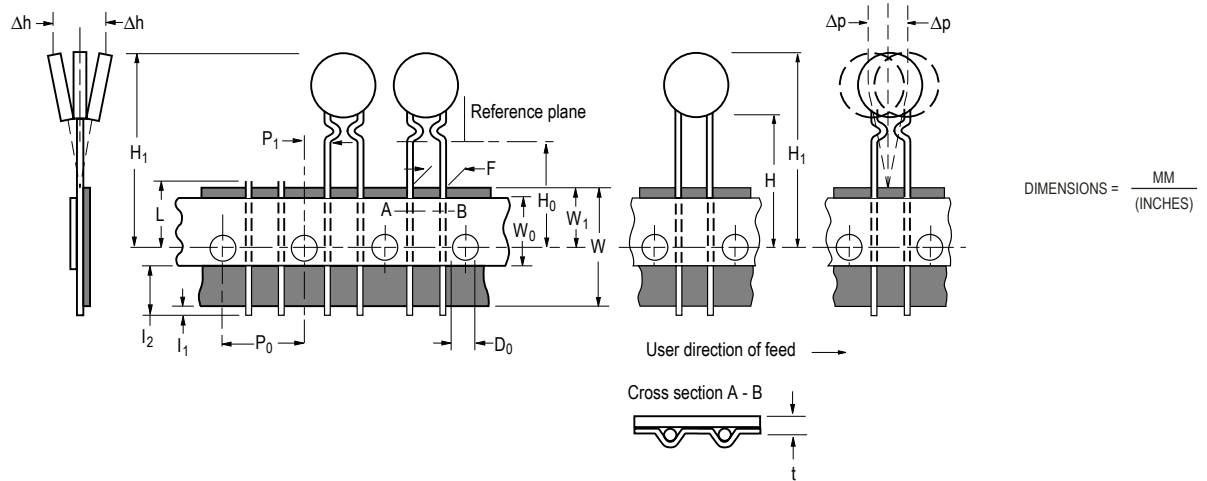

Reel Dimensions - Figure 2

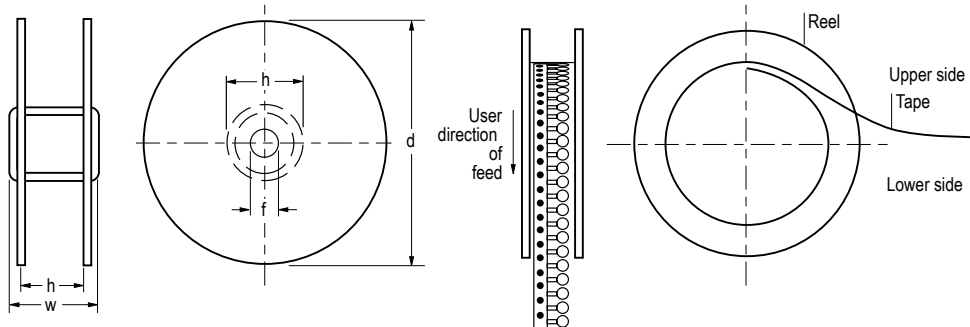

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Customers should verify actual device performance in their specific applications.