

MSP

Pushbutton Switches




RoHS Compliant

Specifications

Contact specs.	Silver plated contacts	
Rating	Max.	3A 125VAC
Initial contact resistance	20mΩ max. (1A 2~4VDC)	
Dielectric strength	1,000VAC 1 minute	
Insulation resistance	100MΩ min.	(500VDC)
Electrical life	5,000 operations	


Part Numbering

MSP 1 03 B - Z

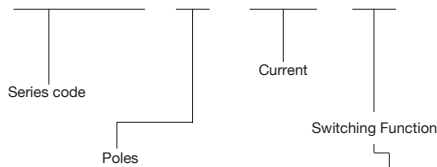


Code	Switching Function
B	ON — (OFF)
C	OFF — (ON)

Terminal Style



SPST

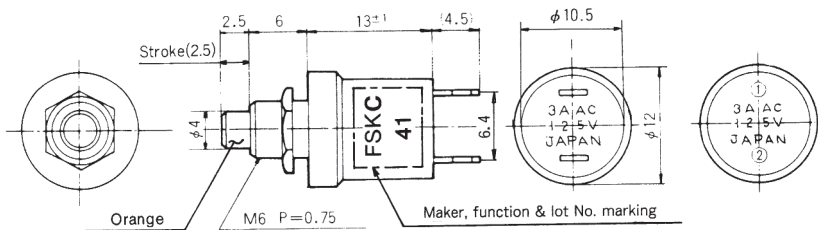

Terminal numbers are not shown on the switch.


Switching function	Part No.	
Part No.	MSP103B-Z	MSP103C-Z
Switching function	ON	OFF
Connecting terminals	1-2	—
Switching function		
Part No.	MSP103C-Z	MSP103B-Z
Switching function	OFF	ON
Connecting terminals	—	1-2

Standard Accessories

〈Supplied with switch〉


Hex Nut

140008010237



Panel Cut-Out Dimensions

Panel thickness : 3.5 mm max.



Soldering Specifications

- (1) Manual Soldering
Device : Soldering iron
- (2) 380°C, 3 seconds, Max.

(ON)&(OFF) : Momentary.